




O-SMART PRO / SERIES

Outdoor Fixed Installation


Led Display

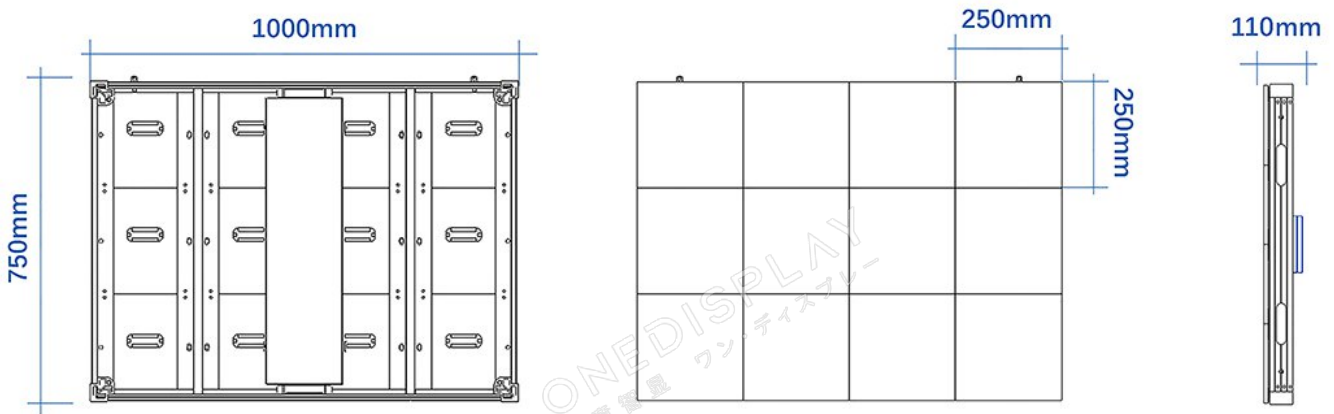

Parameters


ITEM	P2.9	P3.9
Pixel Pitch	2.976 mm	3.91 mm
Max. Brightness	≥ 6000 nits	≥ 6000 nits
Module Size (WxH) (mm)	250 x 250	250 x 250
Module Resolution (dots)	84 x 84	64 x 64
Panel Dimension (mm)	1000mmx750mmx110mm	1000mmx750mmx110mm
Panel Dimension (Inch)	39.37" x 29.53" x 4.33"	39.37" x 29.53" x 4.33"
Panel Resolution (H x V)	336 x 252	256 x 192
Weight Per Panel	25 kg	25 kg
Power Consumption (Avg)(W/m ²)	300	285
Power Consumption (Max)(W/m ²)	900	850
LED Configuration	SMD1415	SMD1921
Viewing Angle Vertical	150°	150°
Viewing Angle Horizontal	150°	150°
Refresh Rate	4880Hz	3840Hz
Gray Scale(level)	16 bit	16 bit
Pixel Density(dots/m ²)	112896	65536
Driving Mode(Scan)	1/14	1/8
Frame Material	Alumium Profile	Alumium Profile
Operational Temp / Humidity	-20°-50°C, 10-90% RH	-20°-50°C, 10-90% RH
IP Rating	Outdoor	Outdoor
Certifications	CE,ETL,FCC,RoHs	CE,ETL,FCC,RoHs
Maintenance Method	Front & Rear	Front & Rear
Certification		

01 High Definition Effective Display

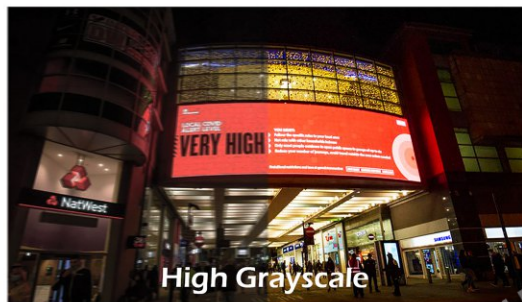


High Precision Aluminum Frame Design

02

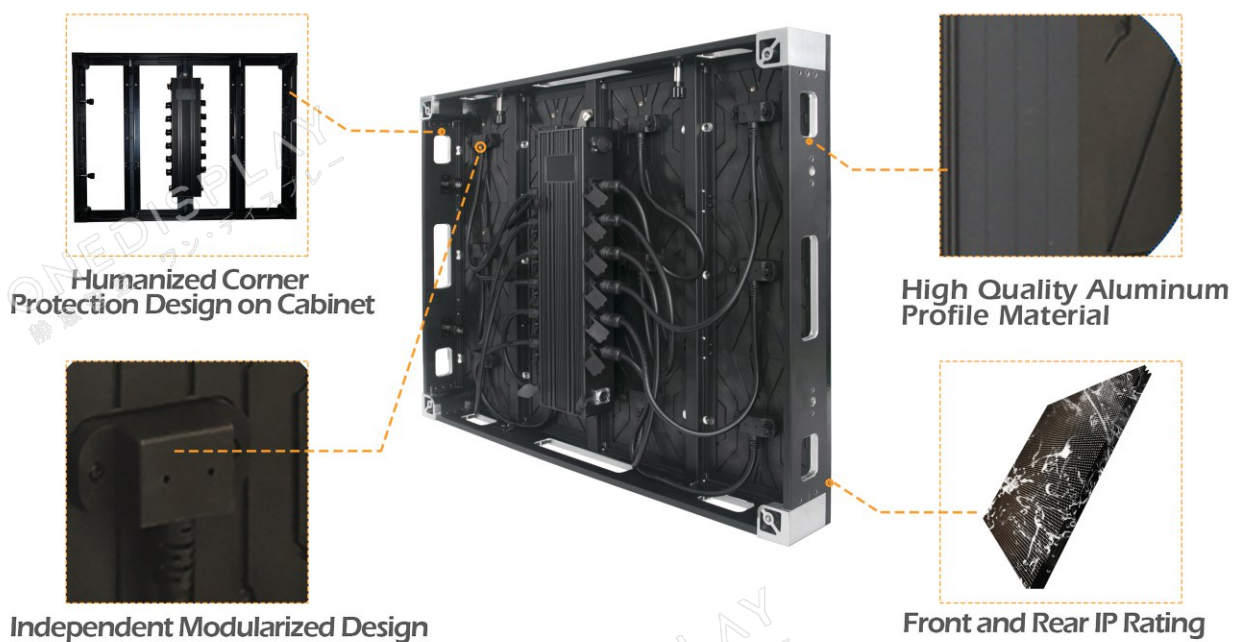

03 Fast And Low Cost Maintenance

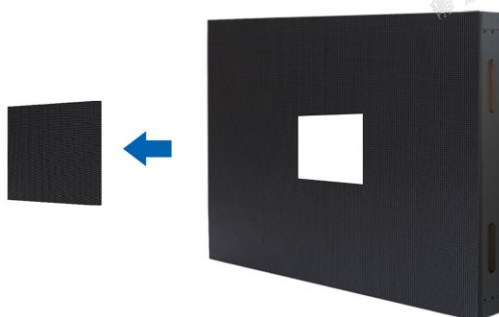

Creative Patent Design for module

04

All Application Scenarios Cases



Outdoor Commercial LED Advertising



Sports/Stadium Peripheral Billboard



Outdoor Dynamic Advertising Display




Rental Trailer Mobile Led Display

Various Installation Ways Based On Your Needs


05




Wall-Mounted

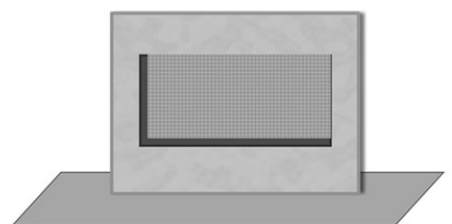

Embedded Wall

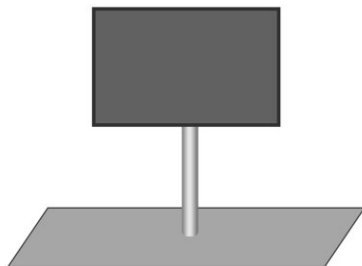

Pillar

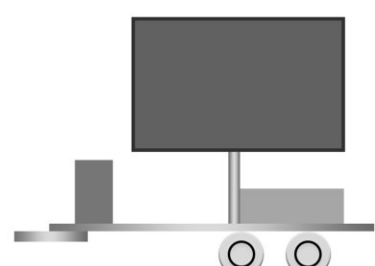

Rental Trailer

Outdoor Fixed Installation Led Display

O-SMART PRO

SERIRS

LED Screen Manufacturer in China



One Display Limited

Email: marketing@onedisplay.net

Office Number: +86 755-29948922

Tel/Whatsapp: +86 136 3278 9913

Address: Building 5A, Huaqiang Idea Park,
GuangMing New District, Shenzhen, 518107, China.